Results of the Prototype Camera for FACT

Thomas Krähenbühl for the FACT collaboration

Institute for Particle Physics
ETH Zurich, Switzerland

7th International Workshop on Ring Imaging Cherenkov Detectors
RICH 2010

Cassis, May 2010

ETH
Eidgenössische Technische Hochschule Zürich
Swiss Federal Institute of Technology Zurich

Overview

What is VHE γ-ray astronomy?

Some cosmic sources emit photons in the Very High Energy range:


AGN


SNR


GRB


Pulsars

Indirect measurement of these photons:

- Primary γ induce air shower
- Secondary particles emit Cherenkov light...
- ...which is detected by Imaging Atmospheric Cherenkov Telescopes (IACT)
- See talks on MAGIC, H.E.S.S. and CTA

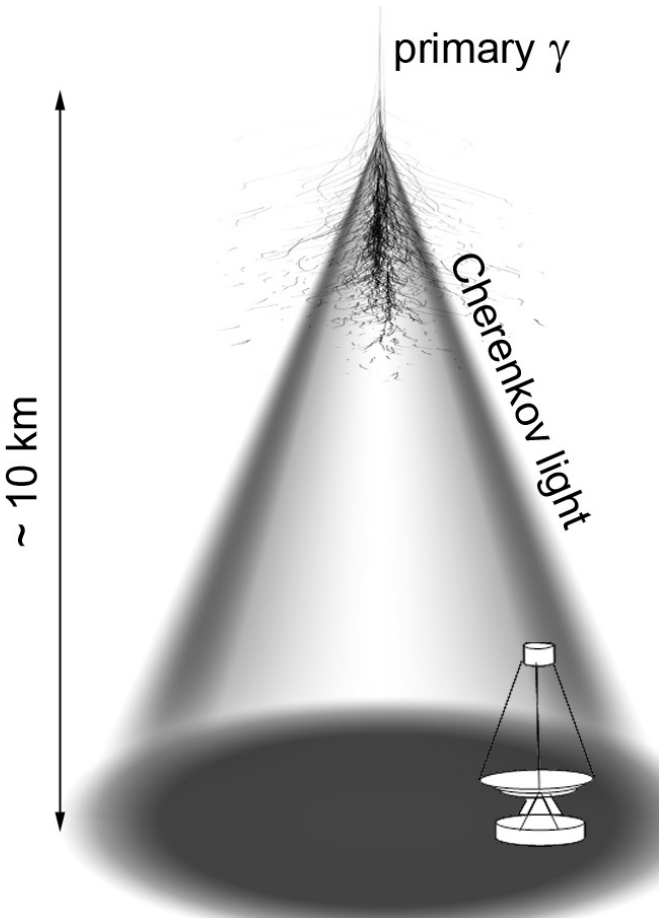

Camera requirements

Sensitivity: very few photons, eg. for $E_\gamma \approx 1\,TeV$: 100 photons/m^2 (300-600 nm, 2000 m a.s.l.).

Speed: very short flashes of a few nanoseconds.

Ruggedness: operation under outdoor conditions with high night sky background and temperature variations.

Ease of use: homogeneity, accidental triggers...

Today's IACTs (eg. MAGIC, H.E.S.S., VERITAS...) use cameras based on photomultiplier tubes.

General properties of G-APDs

Geiger-mode Avalanche Photodetectors (G-APDs or SiPM, MPPC, PPD...)

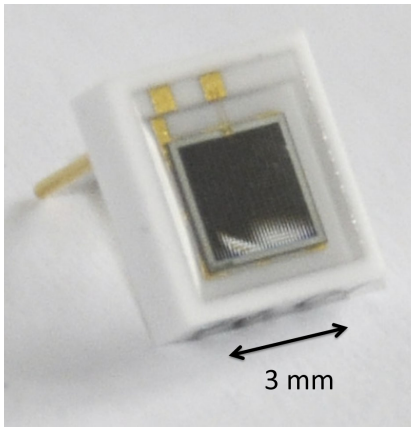

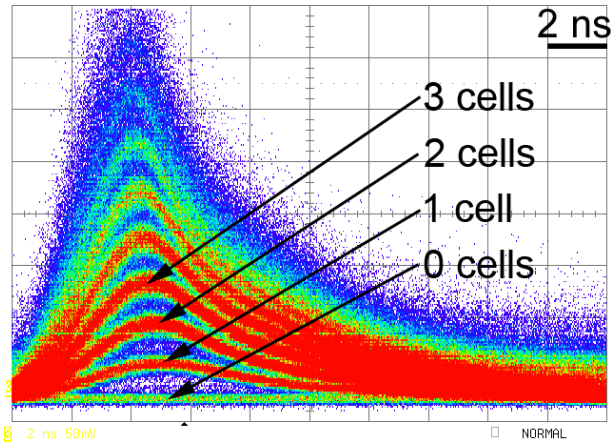

- are semiconductor photosensors
- are divided into a matrix of cells, 30-70% active area
- are very sensitive: photon detection efficiency 30 %-50 %
- have a gain of $10^5 - 10^7$
- operate at low bias voltages $< 100\ V$
- are tolerant to bright light
- show no ageing

Working principle and temperature dependence

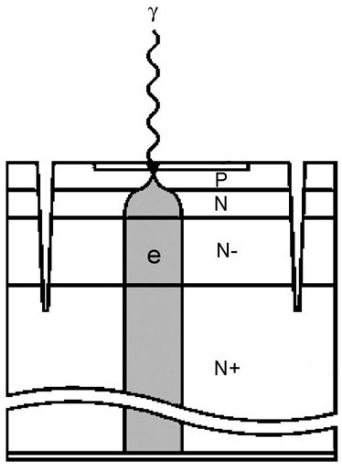

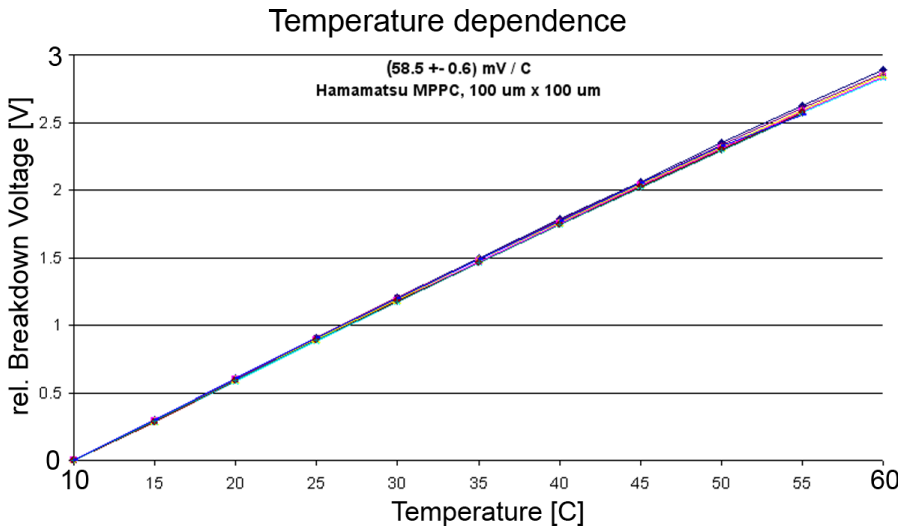

- Electron-hole pair production of the incoming photon
- Operation voltage V_{op} applied $\rightarrow$ avalanche amplification
- If V_{op} larger than the breakdown voltage V_{bd}: the avalanche is self-perpetuating
- Active or passive quenching to stop the avalanche
- Crosstalk: neighbouring cells get triggered by photons emitted during the avalanche process
- The breakdown voltage V_{bd} is temperature dependent ($\approx 58\ mV/K$)

Voltage (temperature) dependencies

Light pulses of constant height: the signal of the G-APD depends on several parameters varying with the so-called overvoltage $V = V_{op} - V_{bd}$:

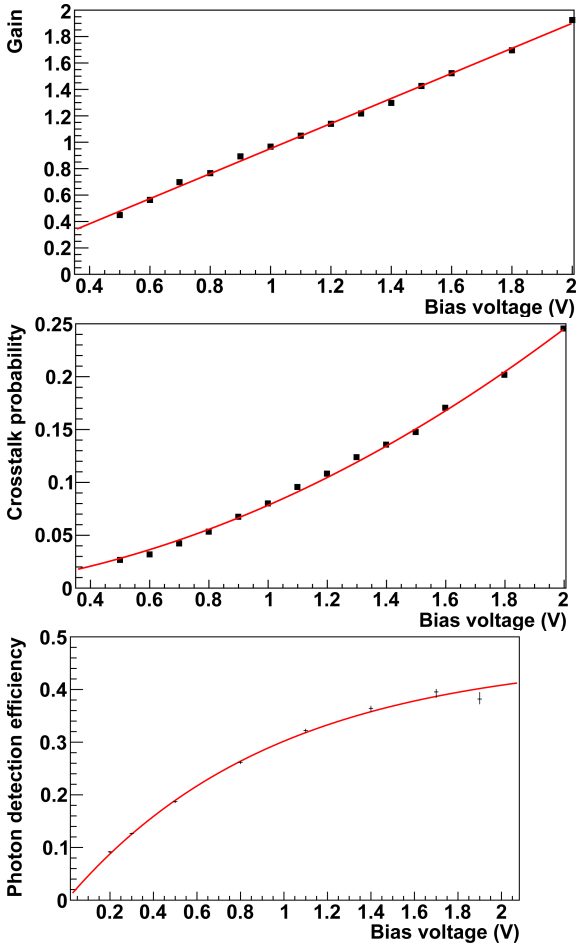

Gain (Charge released per triggered cell [in elementary charges])
Parametrization: $p_1 \cdot V$

Crosstalk probability (probability of a triggered cell to trigger another cell)
Parametrization: $p_2 \cdot V^2 + p_3 \cdot V$

Photon detection efficiency (probability of a photon to trigger a G-APD cell)
Parametrization: $p_4 \cdot (1 - e^{-V/p_5})$

Total dependence on the overvoltage (temperature)

$\Rightarrow$ The total dependence on $V = V_{op} - V_{bd}$ is non-linear.
Hamamatsu S10362-33-050C: approximately proportional to $V^{1.66}$.

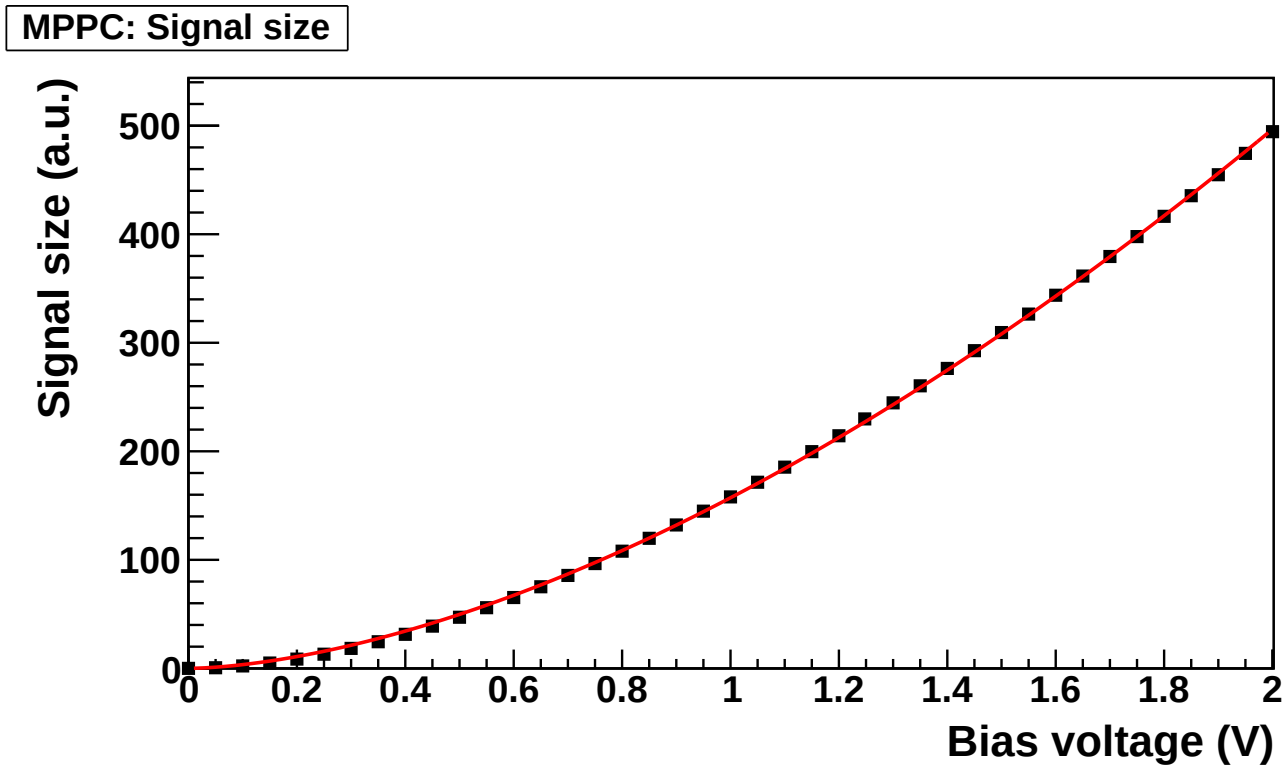

V_{bd} is temperature dependent.
$\Rightarrow$ The response of G-APDs is temperature dependent.

Prototype: design

The First G-APD Cherenkov Telescope (FACT) Project: build an IACT camera based on G-APDs.
Prototype camera module: gain first practical experience.

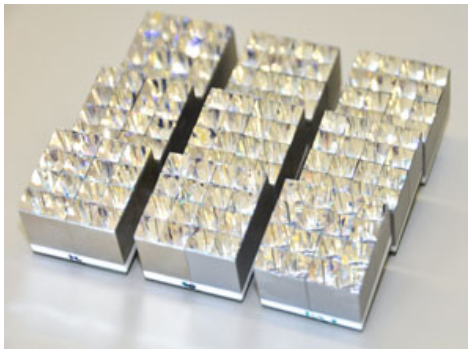
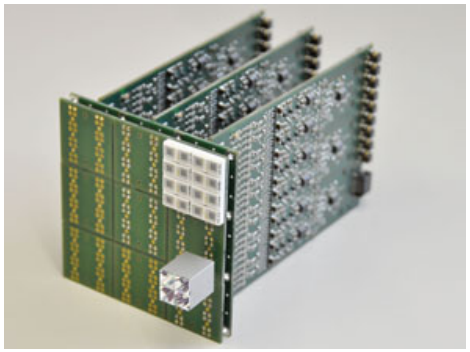
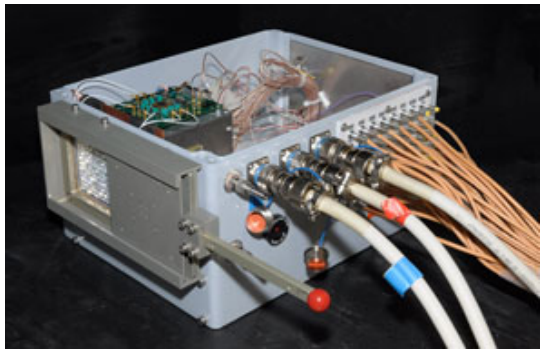

- Simple light collectors: concentrate the incoming light onto the sensitive area
- 144 G-APDs (Hamamatsu S10362-33-050C): 4 G-APDs per pixel (total 36 pixel)
- Preamplifier boards: distribute also the bias voltage
- Weatherproof camera box including a cooling system

Prototype: Setup at ETH Zurich

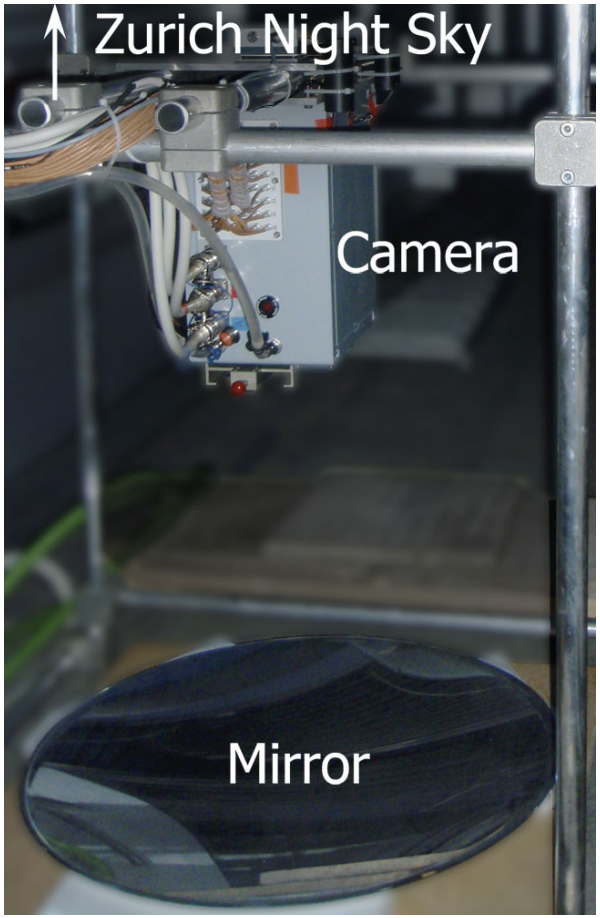

Goal: record the first air shower pictures with a G-APD camera

Mirror: $f = 80$cm, 1° field of view per pixel

Trigger: N out of 16 majority, N=3 or 4, 20 ns coincidence window

Trigger thresholds: $\sim 4 - 7$ photons

Ambient temperature: $20^\circ\mathrm{C}$

Night Sky Background: 1 GHz per pixel

First air shower measurements

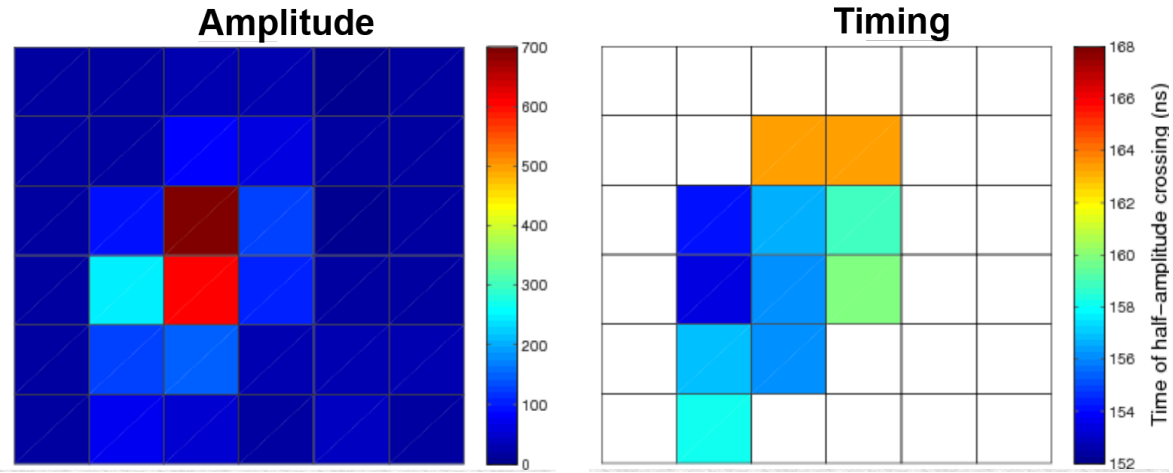

Goal achieved: the first air showers measured with a G-APD camera are recorded during summer 2009 in Zurich.

- 1-3 kHz single pixel trigger rate
- $\sim$ 0.02 Hz data taking
- rate scan confirms the expected behaviour

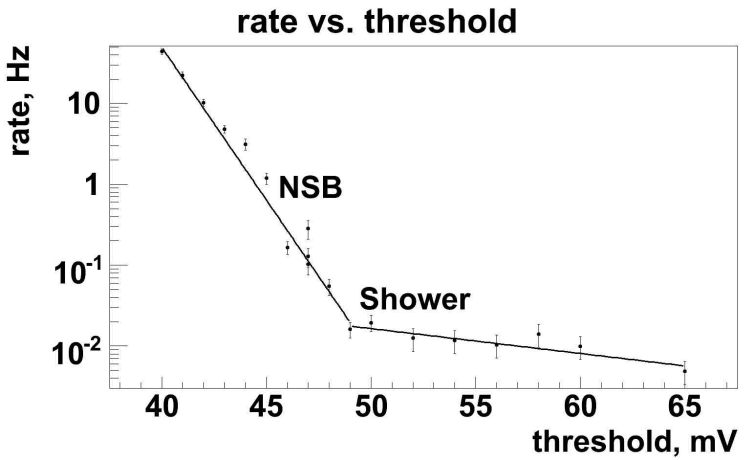

Controlling temperature variations: the feedback system

Outdoor conditions: temperature variations change the camera properties.

Temperature $\rightarrow$ breakdown voltage $\rightarrow$ overvoltage

$\Rightarrow$ Changing photon detection efficiency, crosstalk probability, gain

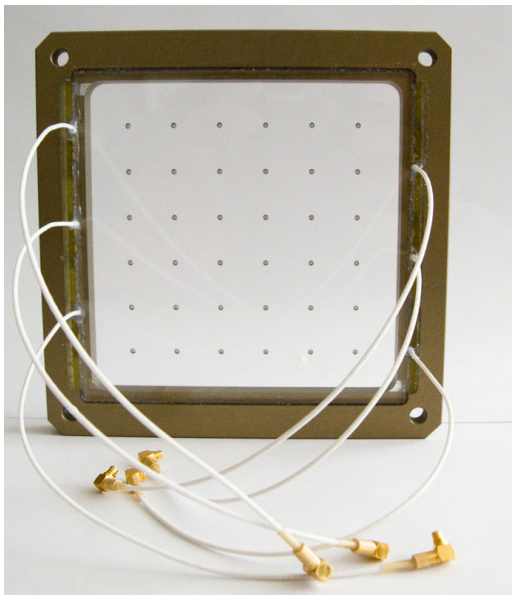

Feedback system:

- Temperature stabilized LEDs in the entry window
- Short pulses
- Pulse reconstruction
- Voltage adjustment towards a target value

Feedback system test

Long-time measurement: January 20-22 2010.

First phase: feedback system deactivated, temperature change 10.6 K

Second phase: feedback system running, temperature change 7.6 K

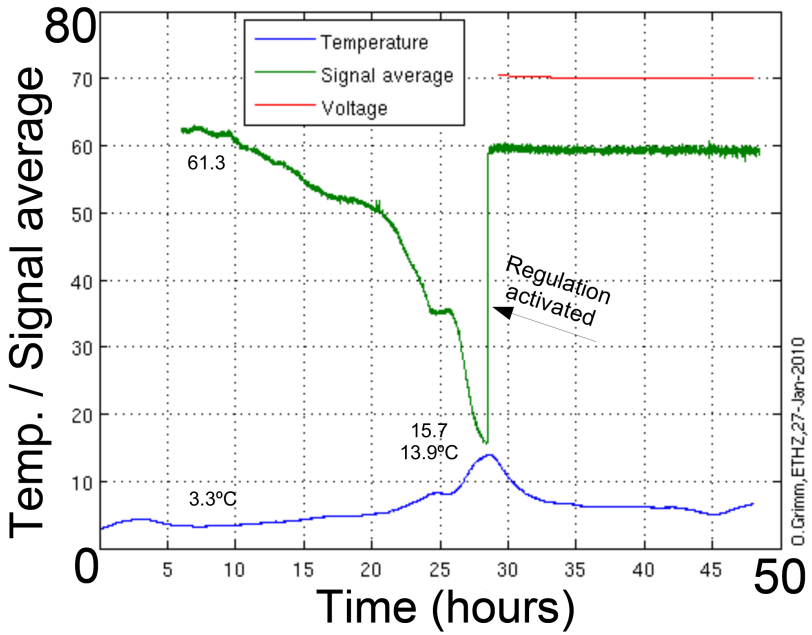

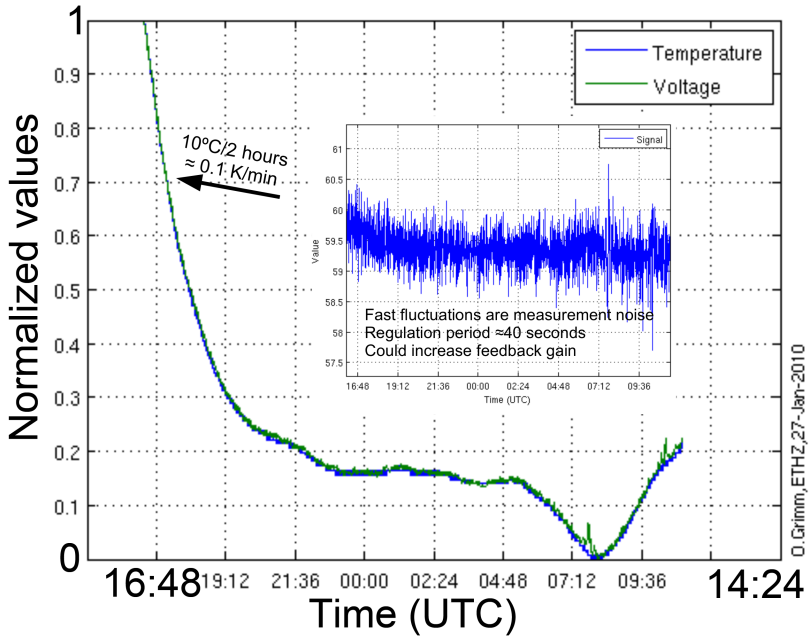

⇒ Signal size stable within ≈ 0.5%.

Without feedback system: variations by more than a factor of 2.

The FACT Camera

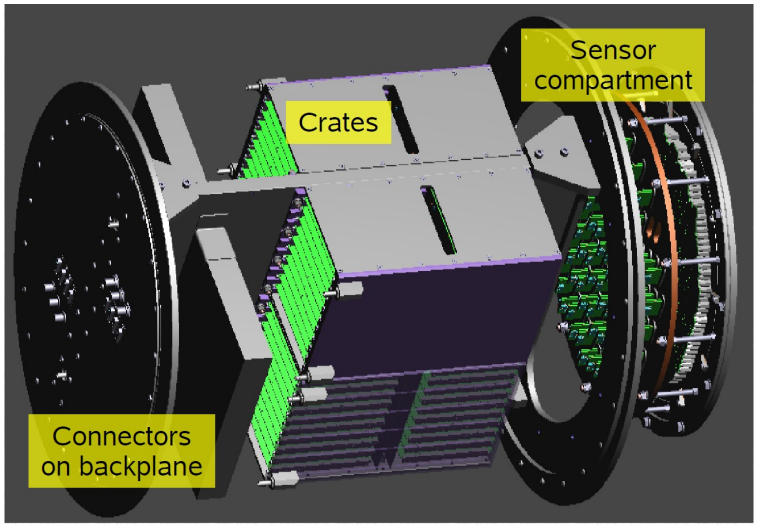

- Goal: build and operate the first Cherenkov telescope based on G-APDs
- 1440 G-APDs, fully integrated DAQ based on the Domino Ring Sampling DRS4 chip
- Trigger using analog sums of 9 pixels
- Telescope mount
  - situated at La Palma, Canary Islands
  - a refurbished telescope from the HEGRA experiment
  - 9.5 m^2 mirror area
- Starting point for the Dedicated Multi-Wavelength AGN Research Facility (DWARF)

Summary

- A prototype module consisting of 144 G-APDs successfully tested and in operation since summer 2009
- First air shower pictures with a camera based on G-APDs
- Feedback system to correct for changes in the ambient temperature: gain stability $\approx 0.5\%$.
- Full-sized camera under construction